

Jeo Coral

HOMOGENEOUS FLOORING




Jeoflor
AUSTRIA



34-43

Jeo Coral

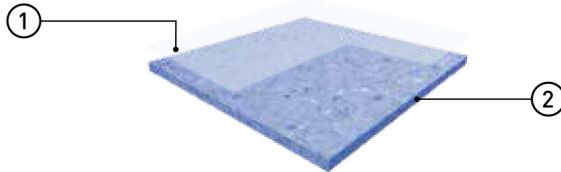

- ① PUR+ surface treatment
- ② Compacted homogeneous floorcovering

- » High performance flexible homogeneous multipurpose flooring
- » PUR+ surface treatment for easy maintenance
- » High traffic & wear resistance
- » Incorporate bacteriostatic and fungistatic activity
- » Antistatic
- » Non-directional polychrome design, available in 25 contemporary colours

INSTALLATION

Installation should be carried out in accordance with local standards. Subfloor should be smooth, hard, clean and dry prior to laying. Where applicable, the subfloor must incorporate an effective Damp Proof Membrane. The material must be allowed to acclimatize 24 hours before installation in a room temperature of between 18-24°C. All seams must be hot welded using Gerflor matching welding rod.

MAINTENANCE

No emulsion dressing is required. Maintenance should be carried out regularly to retain in the appearance and durability of the floor. The floorcovering should be maintained with regular sweeping and damp mopping using a neutral cleanser. More intense cleaning should be carried out using a fine spray cleaning pad under a floor machine, or for larger areas combined machine cleaning.


⚠ Rubber leaves indelible stains on vinyl flooring: do not use mats with rubber backing and replace tubular furniture feet with those made of PVC or polyamide.




Jeo Coral




34-43

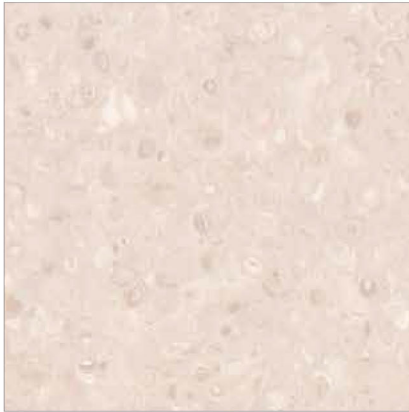

3031

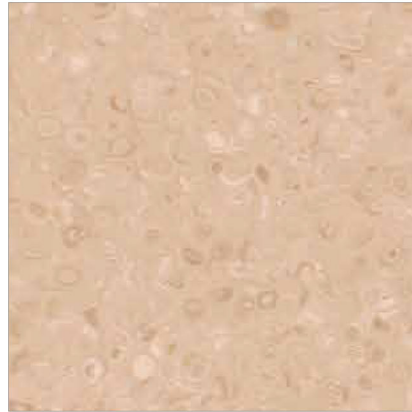


3046

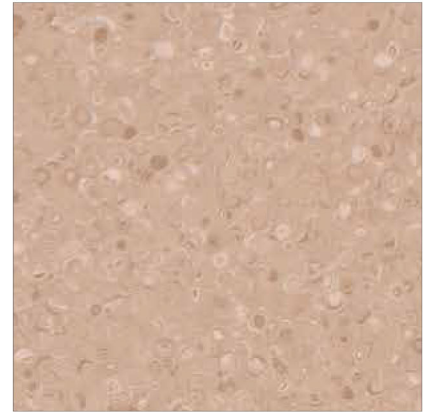

3030



3048

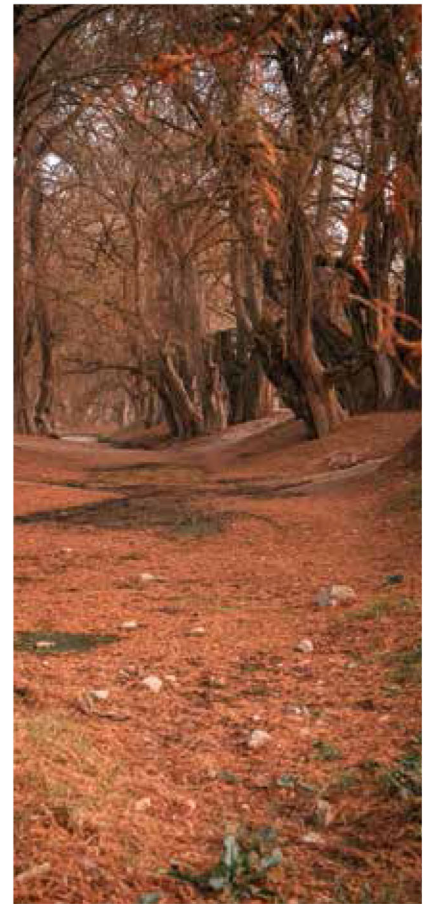


3049




3042




Jeo Coral

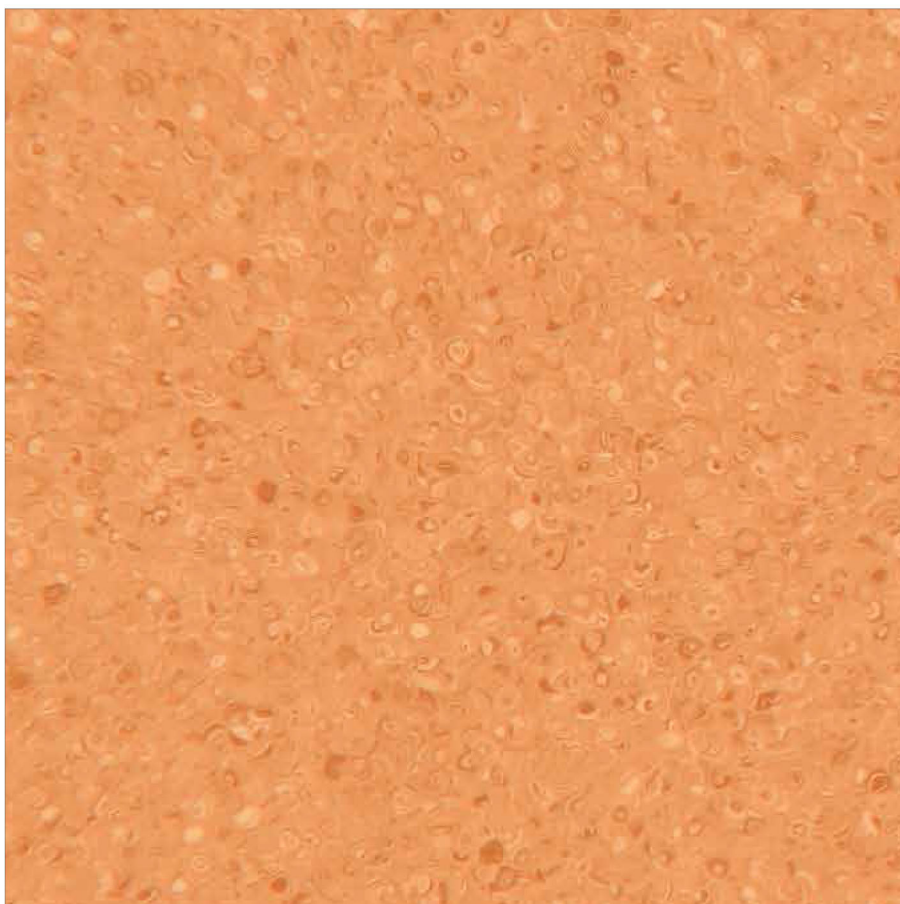


3029*

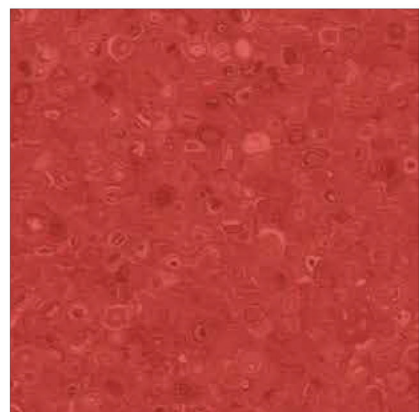


3027*

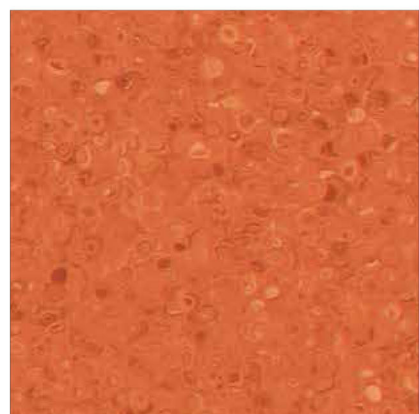


3028*

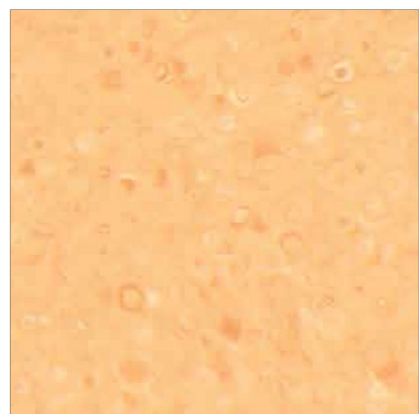


5032

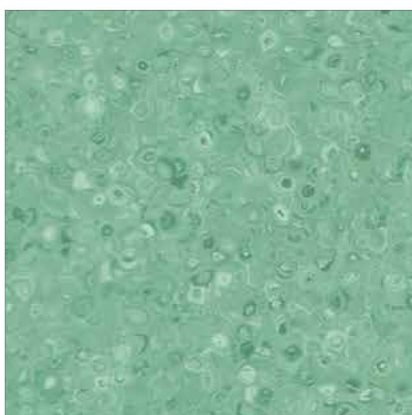

3034

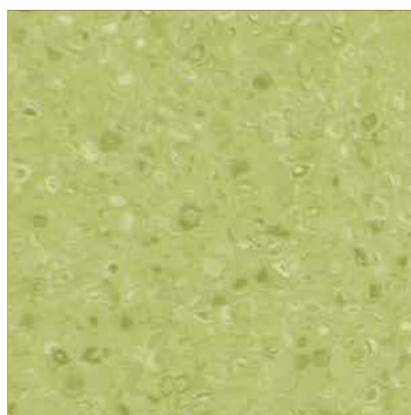

3035

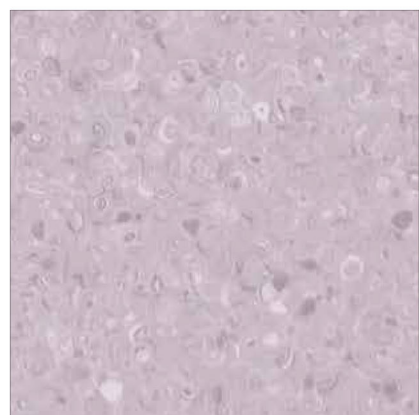


3045*




Jeo Coral



34-43

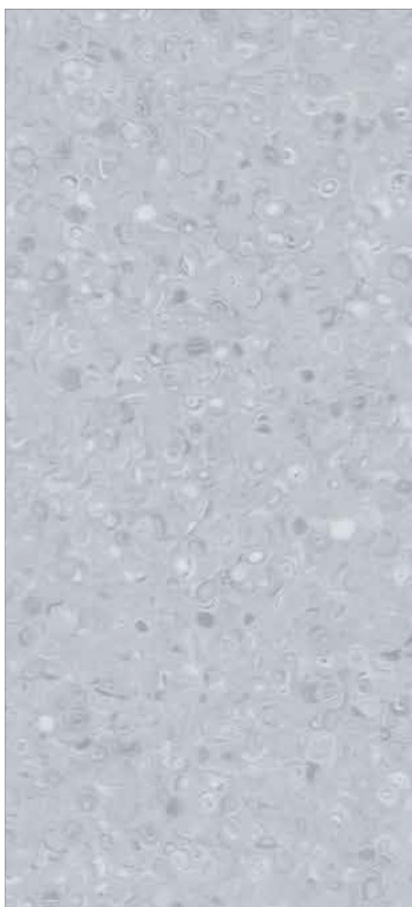

3039

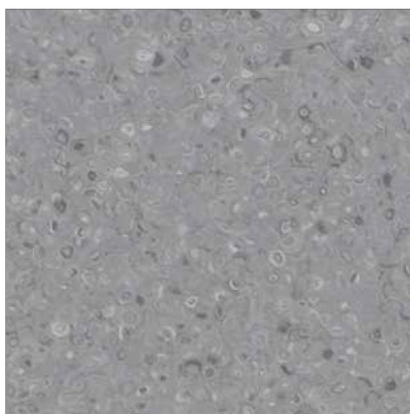


3038



3037*



3044*

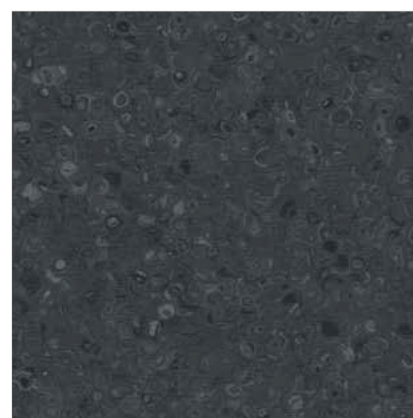

3036*



3047




Jeo Coral




34-43





3041

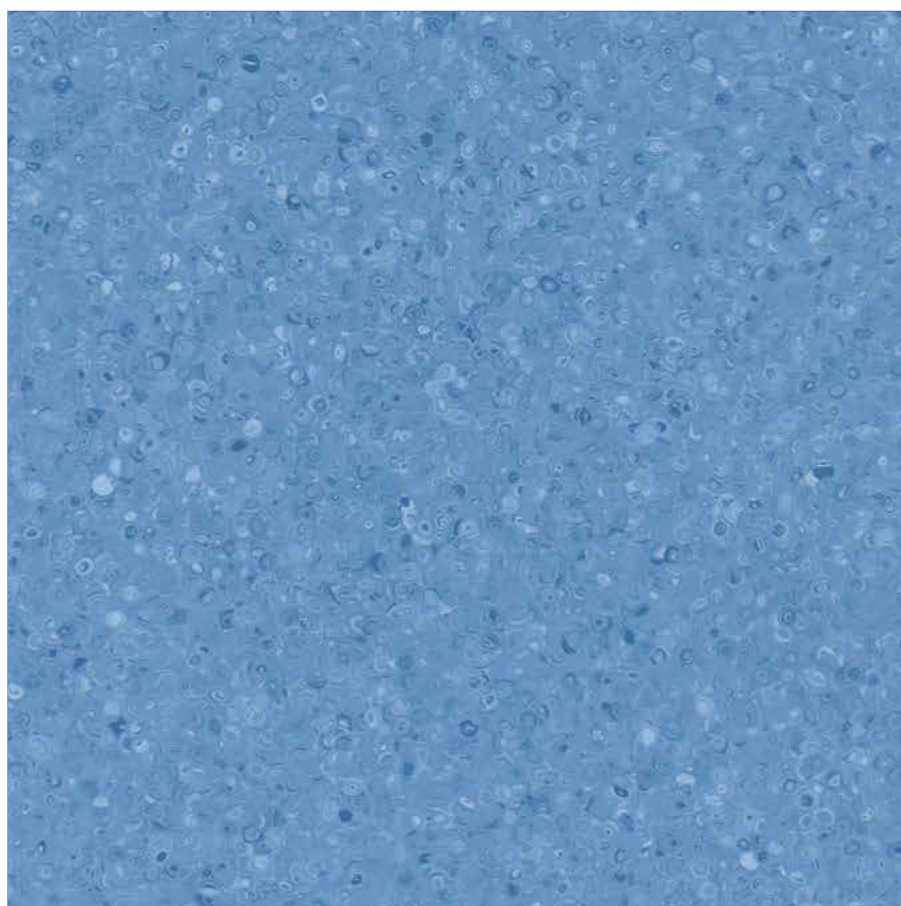


3024

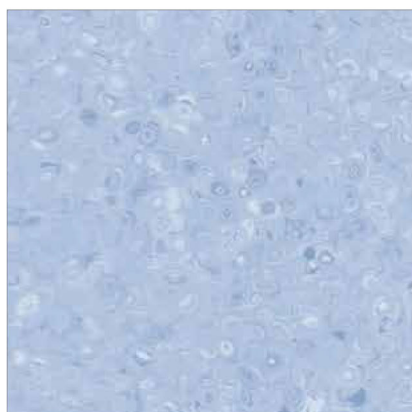


3025

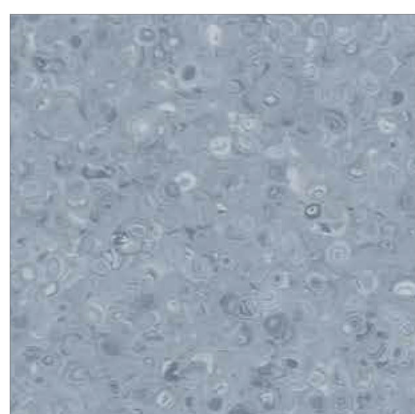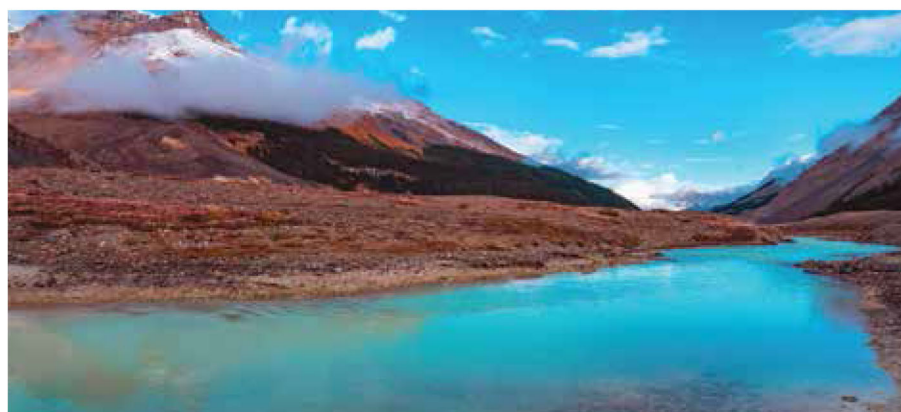

3040*

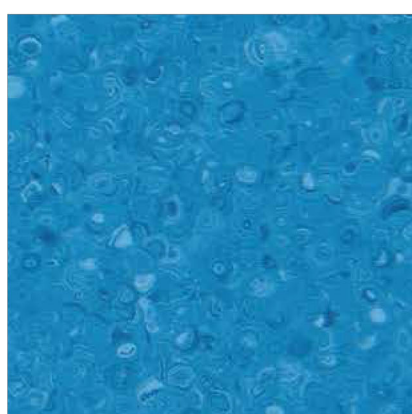

3022*

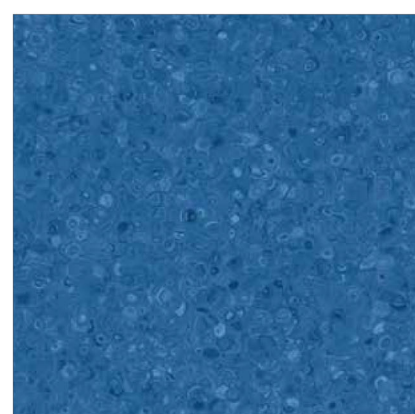

3023



* MOQ requirement

Jeo Coral

Surface treatment innovation

PUR + surface treatment.

- » Good resistance to chemicals and scuffing
- » High resistance to scratches and staining
- » Easy to clean
- » No wax for life

Performances and benefits



Matt finish surface: enhanced design & colour



Homogeneous vinyl flooring suitable for heavy duty traffic areas



Available in 2m sheet



Non-directional design available in 25 references



Highly flexible homogeneous flooring, easy to install & weld

LOW VOC EMISSION, GOOD INDOOR AIR QUALITY

LCA

- Manufactured in an ISO 14001 and ISO 50001 certified site
- Product specific EPD (Environmental Products Declaration) available
- Eco-designed according to a product specific Life Cycle Analysis
- Contribution to many Green Building Schemes (LEED, HQE, BREEAM)
- Patented surface treatment PUR+ protected to reduce drastically the use of chemical products and water and ensure the lowest environmental impact



WELLNESS

Health

- Antibacterial activity (Inhibits growth > 99%)

Comfort

- Walking comfort < 75 dB



COMPOSITION

100% REACH compliant

- FREE of formaldehyde
- FREE of heavy metals
- FREE of Solvent



INDOOR AIR QUALITY

- TVOC emissions 100 times better than norm requirements (TVOC < 10 µg/m³ after 28 days)
- Comply with AgBB protocol
- No formaldehyde emission
- Floorscore certified
- M1 certified



RECYCLABILITY

- 100% recyclable product








RECYCLED CONTENT

- 100% REACH compliant recycled content



TECHNICAL SPECIFICATIONS

Jeoflor

DESCRIPTION			
Total thickness	EN 428	mm	2.0
Weight	EN 430	g/m ²	2800
Width of sheet	EN 426	m	2
Length of sheet	EN 426	lm	20
CLASSIFICATION			
European classification	EN 685		23-33
Fire rating	EN ISO 9239-1 EN ISO 11925-2	Class	Bfl-s1
Toxic testing	GB 18586-2001		Good
Static electrical propensity	EN 1815	KV	≤ 2
Electrical resistance / Anti Static	EN 1081	Ω	10 ⁹ -10 ¹⁰
Slip resistance	DIN 51130	Class	R9
PERFORMANCES			
Dimensional stability	EN 434	%	≤ 0.4
Thermal conductivity	EN 12524	W/(m.k)	0.25
Castor wheel test	EN 425	-	OK
Wear resistance	EN 660.2	mm ³	≤ 2.0
Abrasion Group	EN 649	group	T
Type binder content	ISO 10581	type	I
Residual group	EN 433	mm	≈ 0.02
Colour fastness	EN 20 105 B02	degree	≥ 6
Chemical product resistance	EN 423	class	OK
Antibacterial property MRSA	ISO 22196	-	>99% inhibits growth
Flexibility	ISO 8690	-	Good
Decontamination rated	EN 435	-	Very good
Impact sound reduction	EN ISO 10140/1 EN ISO 717/2	-	Approx.+4DB
Surface treatment	-	UV Protected	PUR+ Iodine stain free
ENVIRONMENT / INDOOR AIR QUALITY			
TVOC after 28 days	ISO 16000 - 6	µg/m ³	<10
CE MARKING			
	EN 14041		 DS  Bfl-s1 

Jeoflor has a policy of continuous product improvement, it reserves the right to change design and specifications without notice.

The implementation of an effective cleaning regime is the most important defence against infections.

Be connected!



#Jeoflor



Our related products!



Floor
Self Leveling



Wall Coverings
& Protections



Skirting &
Profiles



Handrails



LCA

Eco-designed according to a product specific Life Cycle Analysis



WELLNESS

Walking comfort < 75 dB



REACH

COMPOSITION
100% REACH compliant



INDOOR AIR QUALITY

TVOC emissions 100 times better than norm requirements (TVOC < 10 µg/m³ after 28 days)



RECYCLABILITY
100%



RECYCLED CONTENT
25%

Jeoflor

Alptahls GmbH, Bürgergasse 4, 8330 Feldbach, Austria. =

Tel. +43 (0)3152 370 49

info@jeoflor.com www.jeoflor.com

Toll Free : 18002028498

