


Jeoflor[®] Granito

AUSTRIA

HOMOGENEOUS PVC FLOORING






PUR+ protect special maintenance treatment.

Compacted homogeneous floor covering

- The health and safety system complies with ISO 45001.
- The environment system complies with ISO 14001, GB / T20041
- Residual sag value is only 0.02 excellent static and synamic bearing capacity.
- Environment friendly plasticizer a new generation of non phthalic plasticizers suitable for good and packing materials plasticizers.
- Air quality, TVOC release it lower than european standard and the optimal air quality is guaranteed.



2mm
Thickness



2m
Width



20m
Length



Fire
Resistance



Static
Indentation








Chemical
Resistance



Slip
Resistance

TECHNICAL SPECIFICATIONS

DESCRIPTION			
Total thickness	EN 428	mm	2.0
Weight	EN 430	g/m ²	3100
Width of sheet	EN 426	m	2
Length of sheet	EN 426	lm	20
CLASSIFICATION			
European classification	EN 685		34-43
Fire rating	EN ISO 9239-1 EN ISO 11925-2	Class	Bfl-s1
Toxic testing	GB 18586-2001		Good
Static electrical propensity	EN 1815	KV	≤ 2 Antistatic
Electrical resistance / Anti Static	EN 1081	Ω	10 ⁹ -10 ¹⁰
Slip resistance	DIN 51130	Class	R9
PERFORMANCES			
Dimensional stability	EN 434	%	≤ 0.4
Thermal conductivity	EN 12524	W/(m.k)	0.25
Castor wheel test	EN 425	-	OK
Wear resistance	EN 660.2	mm ³	≤ 2.0
Abrasion Group	EN 649	group	P
Type binder content	ISO 10581	type	I
Residual group	EN 433	mm	≈ 0.02
Colour fastness	EN 20 105 B02	degree	≥ 6
Chemical product resistance	EN 423	class	OK
Antibacterial property MRSA	ISO 22196	-	>99% inhibits growth
Flexibility	ISO 8690	-	Good
Decontamination rated	EN 435	-	Very good
Impact sound reduction	EN ISO 10140/1 EN ISO 717/2	-	Approx.+4DB
Surface treatment	-	UV Protected	PUR+
ENVIRONMENT / INDOOR AIR QUALITY			
TVOC after 28 days	ISO 16000 - 6	µg/m ³	<10
CE MARKING			
	EN 14041	   	

The implementation of an effective cleaning regime is the most important defence against infections.



LCA

Eco-designed according to a product specific Life Cycle Analysis



WELLNESS

Walking comfort < 75 dB



COMPOSITION

100% REACH compliant



INDOOR AIR QUALITY

TVOC emissions 100 times better than norm requirements (TVOC < 10 µg/m³ after 28 days)



RECYCLABILITY

100%



RECYCLED CONTENT

25%

Jeoflor®

AUSTRIA

Be connected!



#Jeoflor



Our related products!



Floor Self Leveling



Wall Coverings & Protections



Skirting & Profiles




Handrails



Toll Free : 18002028498



1500 Green

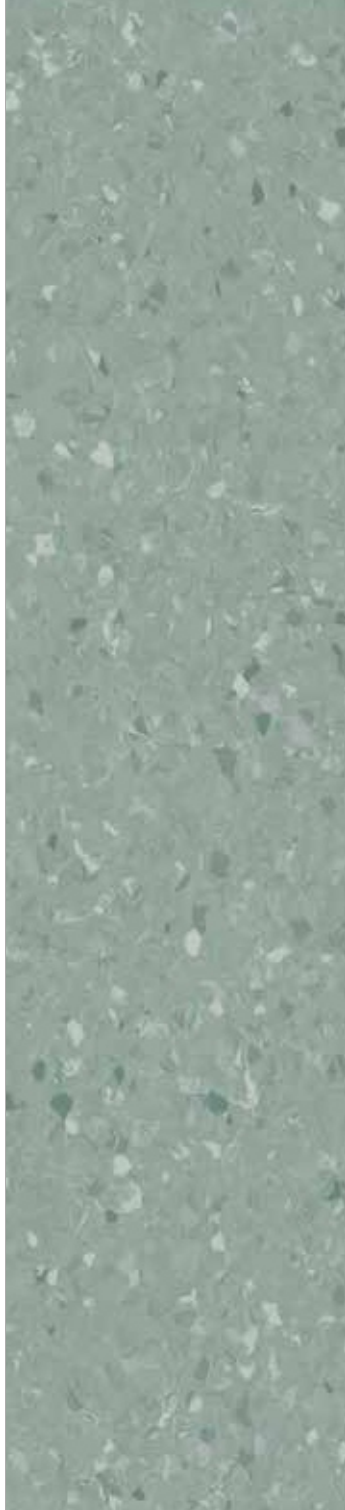

1501 Light Green



1502 Golden Yellow





1503 Chocolate





34-43

2.0mm x 2m x 20m

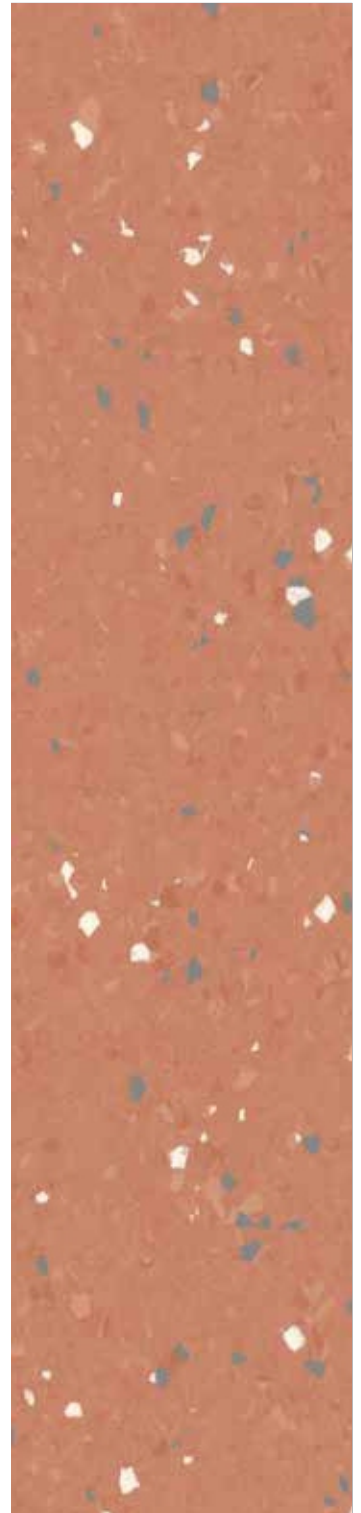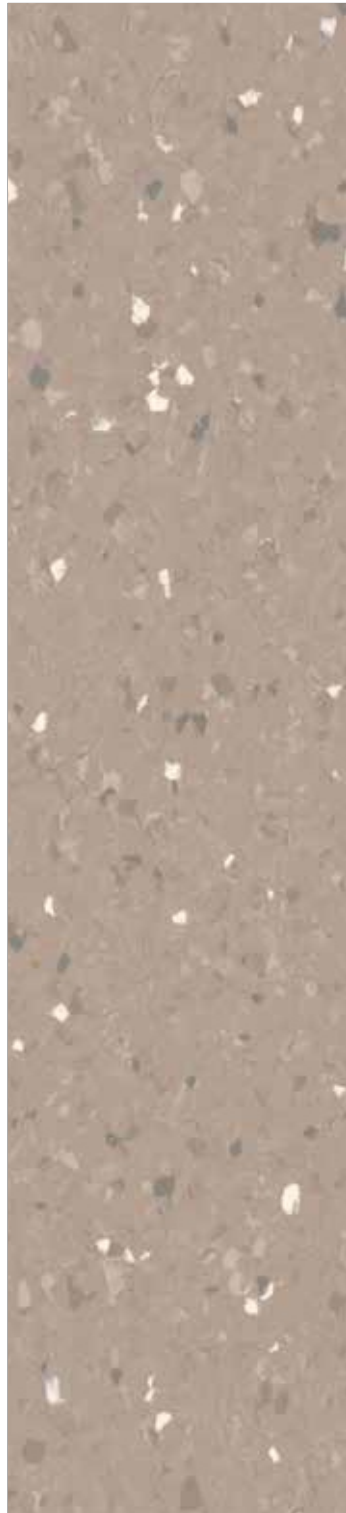

1504 Terracotta



1505 Camel



1506 Tan







1507 Copper





34-43

2.0mm x 2m x 20m

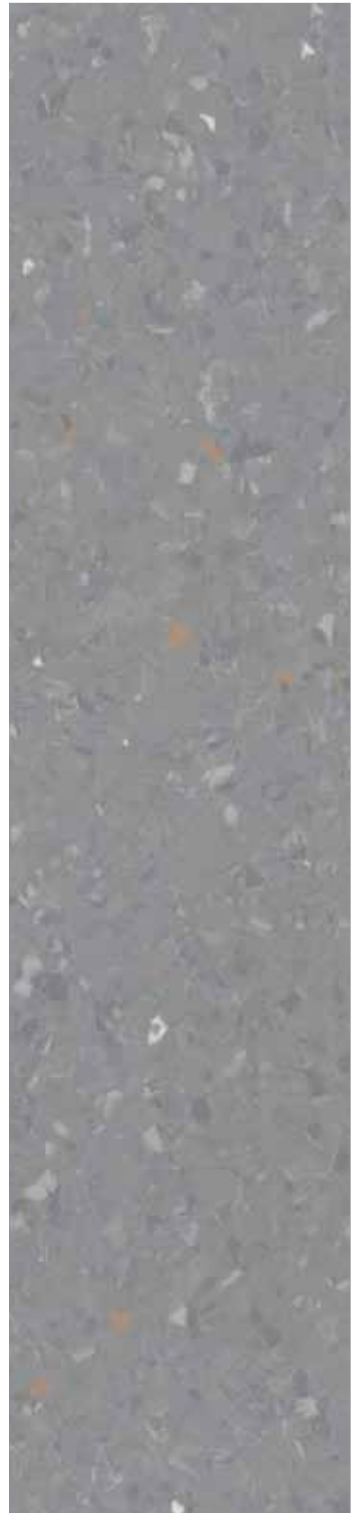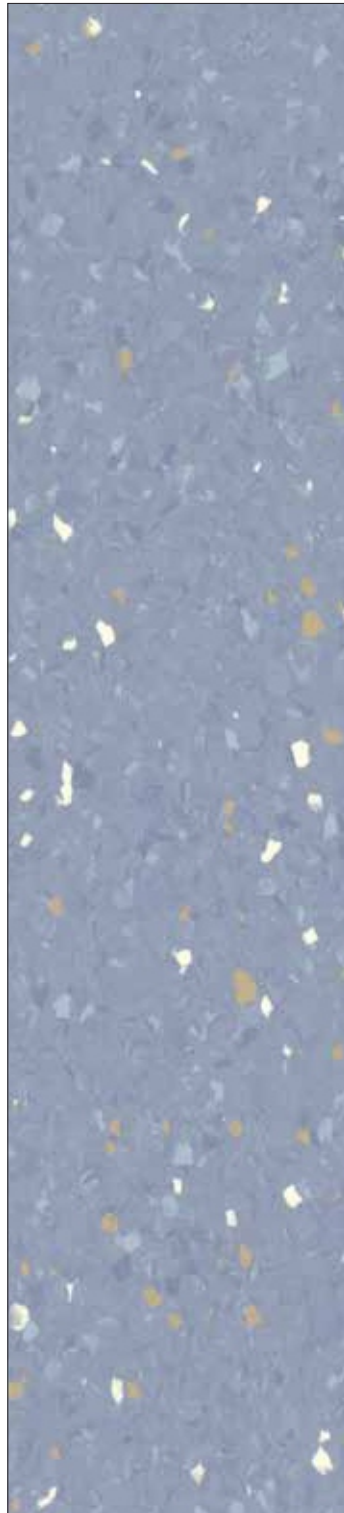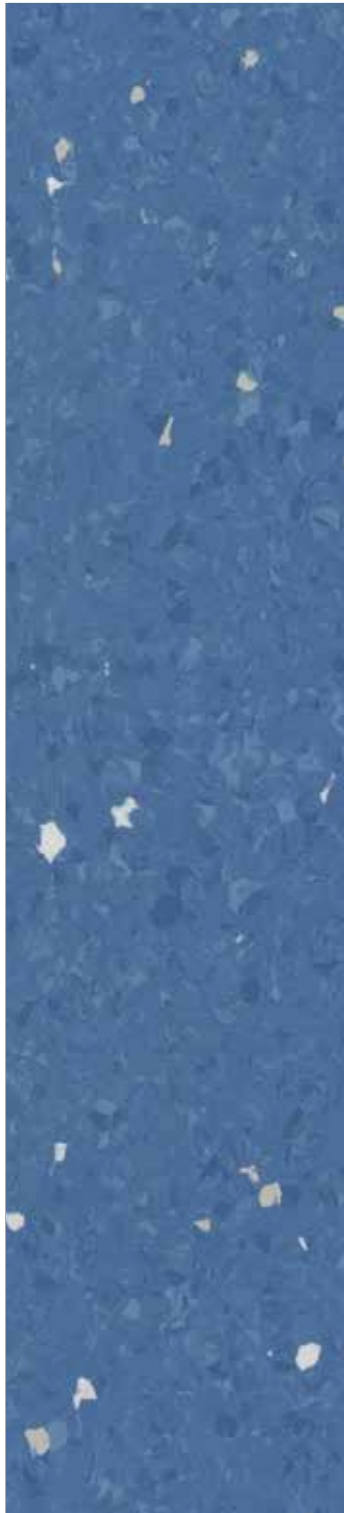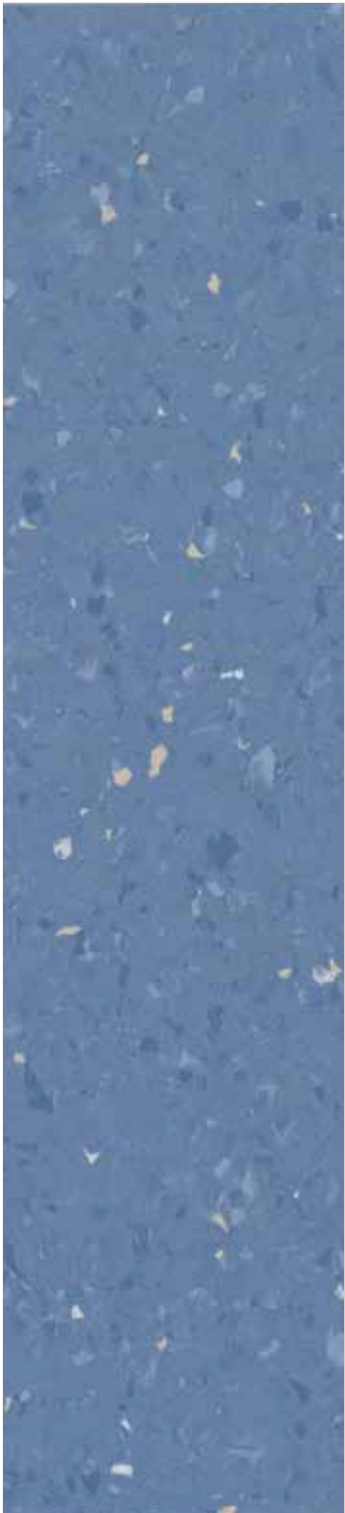

1508 Medium Blue



1509 Dark Blue




1510 Light Blue



1511 Cement




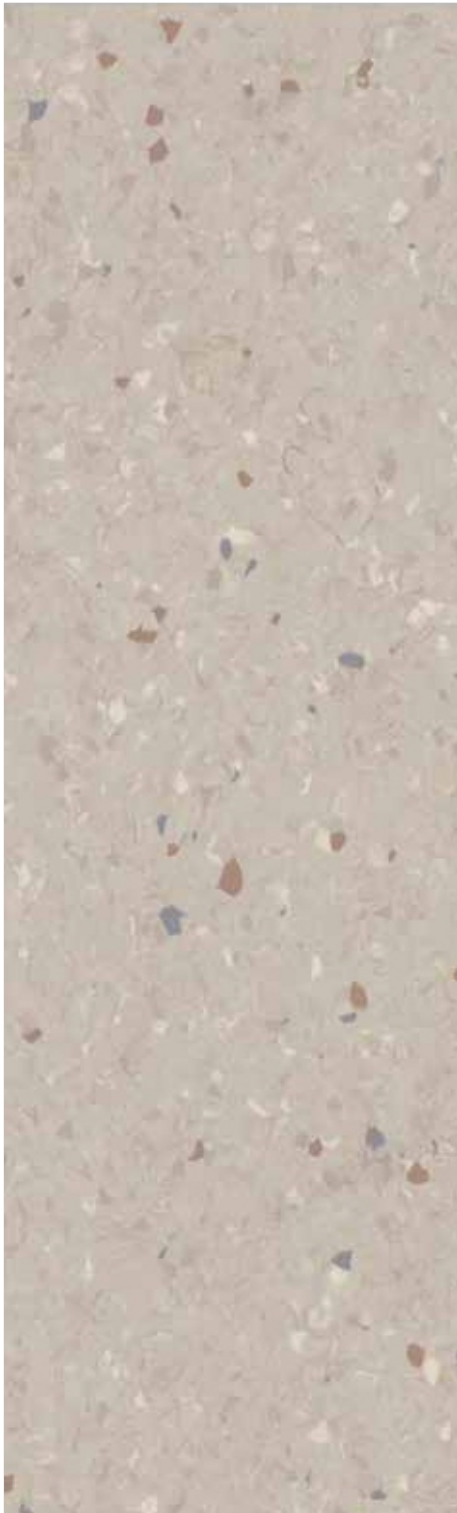

1512 Lava



1513 Misty

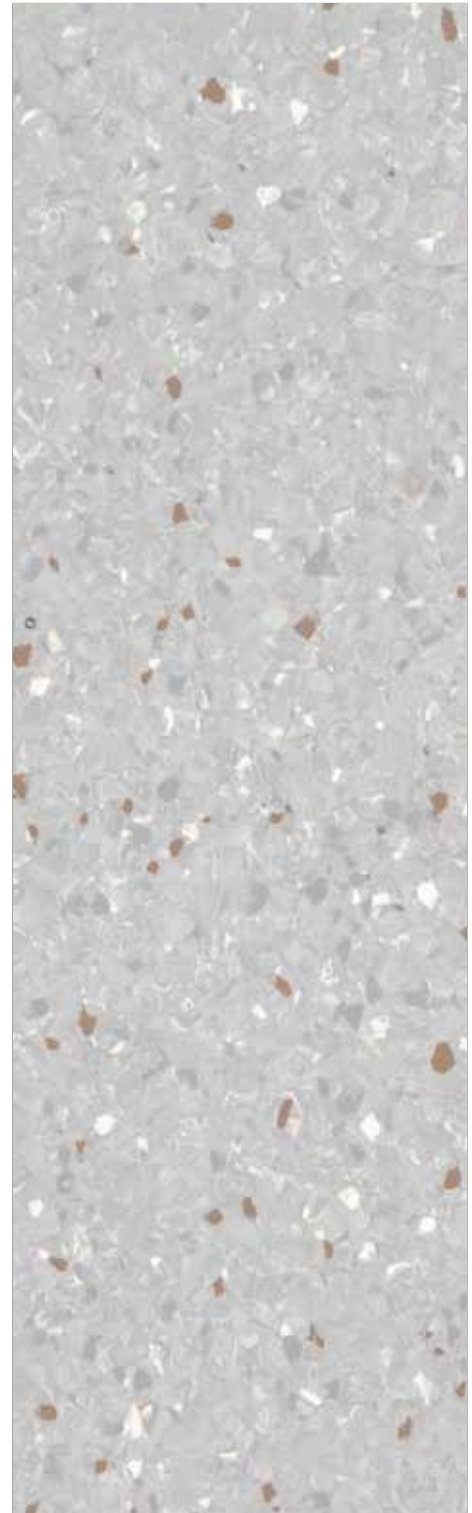

1514 Pearl

