


**JEOPRO**  
SPORTS FLOORING

SPORTS

**Jeoflor**  
AUSTRIA

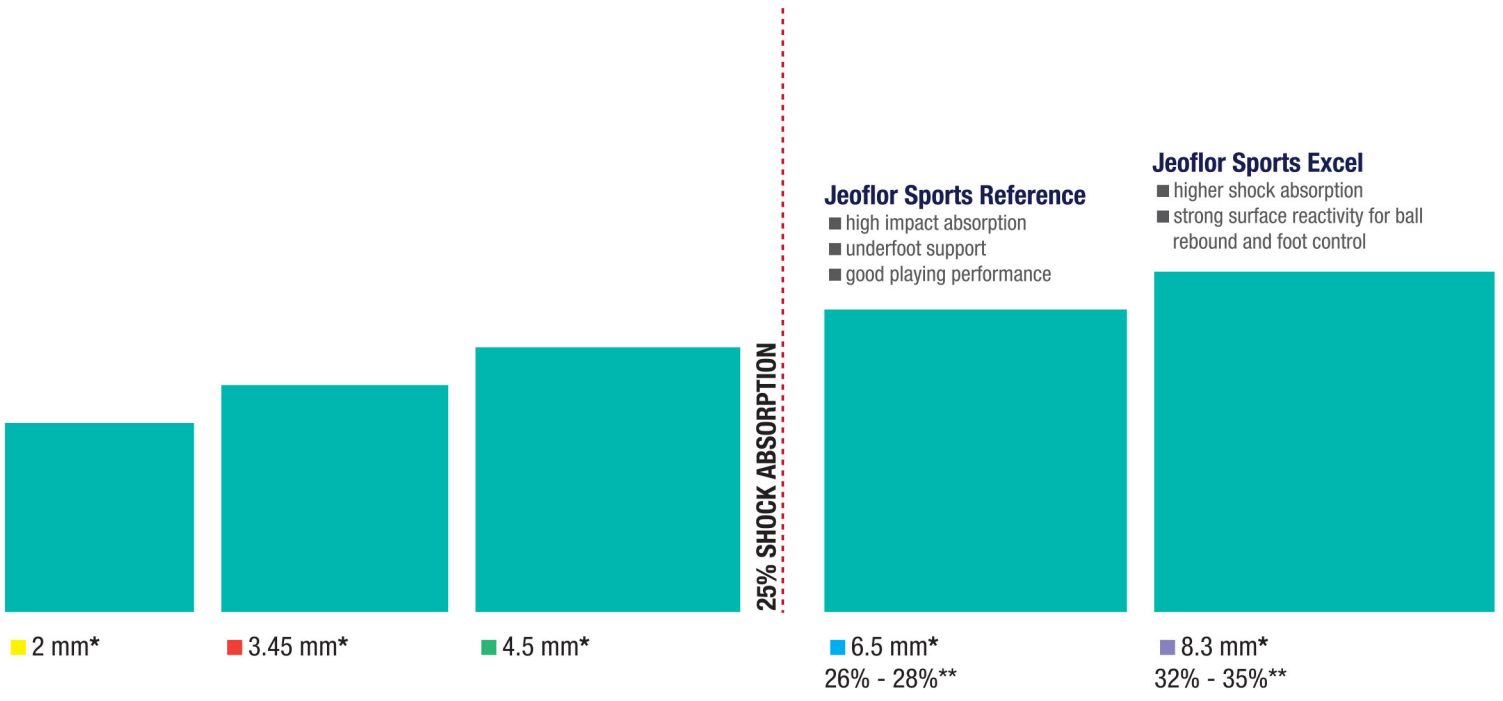


### Jefflor Sports Reference

- high impact absorption
- underfoot support
- good playing performance

### Jefflor Sports Excel

- higher shock absorption
- strong surface reactivity for ball rebound and foot control

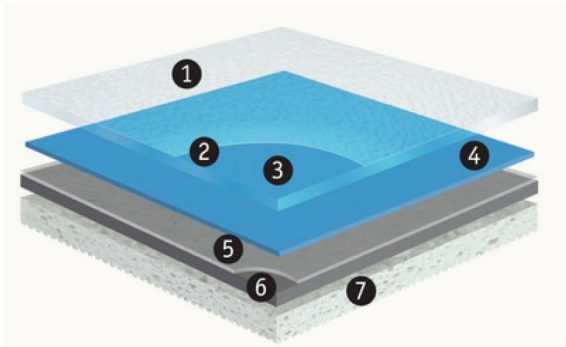

- Adequate balance between friction and grip control.  
Specific engineered surface embossing
- Very high resistance to scratches and easy maintenance.  
TopCLEAN XP™ treatment
- Exceptional resistance to wear.  
Pure transparent vinyl wear layer
- Lively colours and realistic decors.  
High definition printing for a perfect wood surface appearance and built-in units for higher colour intensity
- Superior dimensional stability (<0.10%).  
Unwoven glass fibre
- High resistance to indentation and tearing.  
Solid homogeneous calendered sheet made of recycled vinyl
- Comfort, safety and sound reduction.  
High-density closed-cell foam with engineered honeycomb backing


## WOOD SHADES 6/4.5mm



JP-6375 Oak ■ ■ ■ ■ ■




JP-6381 Maple ■ ■ ■ ■ ■

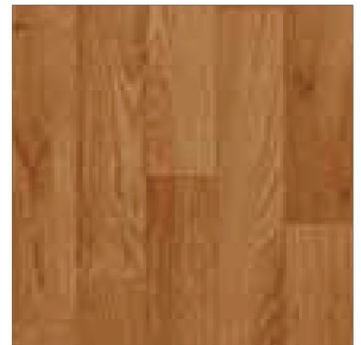


JP-6387 Gunstock Oak ■ ■


## OUTDOOR 6mm



Blue




Green

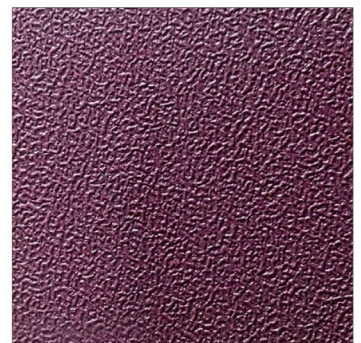


Terracotta

## UNI SHADES **6.5mm**



JP-2021 Dark Orange ■ ■



JP-2020 Light green ■ ■




JP-2026 Mint green ■ ■




JP-2011 Red ■ ■

\*for table tennis  
(glued sample)



JP-2015 Teal ■ ■



JP-2013 Yellow ■ ■



JP-2009 Grey ■ ■



JP-2016 Royal blue ■ ■ ■

## UNI SHADES **4.5mm**



JP-6134 Orange ■ ■



JP-6180 Red ■ ■ \*for table tennis  
(glued sample)



JP-6535 Light green ■ ■




JP-6758 Grey ■ ■




JP-6211 Yellow ■ ■



JP-6570 Dark green ■ ■




JP-6430 Dark blue ■ ■



JP-6445 Blue ■ ■

## TECHNICAL DATA

DESCRIPTION	STANDARDS	REQUIREMENT	UNIT	JEOPRO Surface	JEOPRO Evolution	JEOPRO Performance	JEOPRO Outdoor
Thickness	EN428	-	mm	2mm	4.5mm	6.5mm	6mm
Weight	EN430	-	Kg/m <sup>2</sup>	2300	3300	4500	5000
Length*	EN 426	-	lm	20	15	15	15
Width	EN 426	-	lm	2	1.8	1.8	1.8
SPORTS PROPERTIES							
Shock absorption	EN 14808	≥25	%	-	-	P1	P1
Vertical deformation	EN 14809	≤3.5	mm	-	-	≤2	≤2
Energy return	NF P 90 203	≥ 0.31	m/s	-	≥ 0.31	≥ 0.31	≥ 0.31
Sliding coefficient	EN 13036-4	80 to 110	-	80-110	80-110	80-110	80-110
Ball bounce	EN 12235	≥90	%	≥90	≥90	≥90	≥90
Technical Characteristics							
Abrasion resistance	EN ISO 5470-1	≤1000	mg	≤350	≤350	≤350	≤350
Impact resistance	EN 1517	≥8	N/m	≥8	≥8	≥8	≥8
Indentation resistance	EN 1516	≤0.5	mm	≤0.5	≤0.5	≤0.5	≤0.5
Classification							
Fire	EN 13501-1	-	Bfl-s1	Bfl-s1	Bfl-s1	Bfl-s1	Bfl-s1
CE MARKING							
		EN 14904 : 2006					

### IMPORTANT NOTE :

Its highly recommended to have zero leveled sub-floor for installation of sports flooring products. Please use **LEVEL<sup>o</sup>** self-leveling compound to level the sub-floor



### LIFE CYCLE ANALYSIS

- Manufactured in an ISO 14001: 2015 certified
- Product specific EPD (Environmental Products Declaration) available
- Eco-designed according to a product specific Life Cycle Analysis
- Contribution to many Green Building Schemes



### COMPOSITION

#### 100% REACH compliant

- FREE of formaldehyde
- FREE of heavy metals
- FREE of Solvent



### INDOOR AIR QUALITY

- TVOC emissions 100 times better than norm requirements (TVOC < 10 µg/m<sup>3</sup> after 28 days)
- SGS certified
- No formaldehyde emission



### RECYCLABILITY

- 100% recyclable product



### INSTALLATION

- Innovative **Adhesive Free** installation systems



### RECYCLED CONTENT

- 100% REACH compliant recycled content

Be connected!



#Jeoflor



# Jeoflor

Alptahls GmbH, Bürgergasse 4, 8330 Feldbach, Austria. =

Tel. +43 (0)3152 370 49

info@jeoflor.com www.jeoflor.com

Toll Free : 18002028498

