


# HOMOGENEOUS RESILIENT FLOORING



# HOMOGENEOUS RESILIENT FLOORING



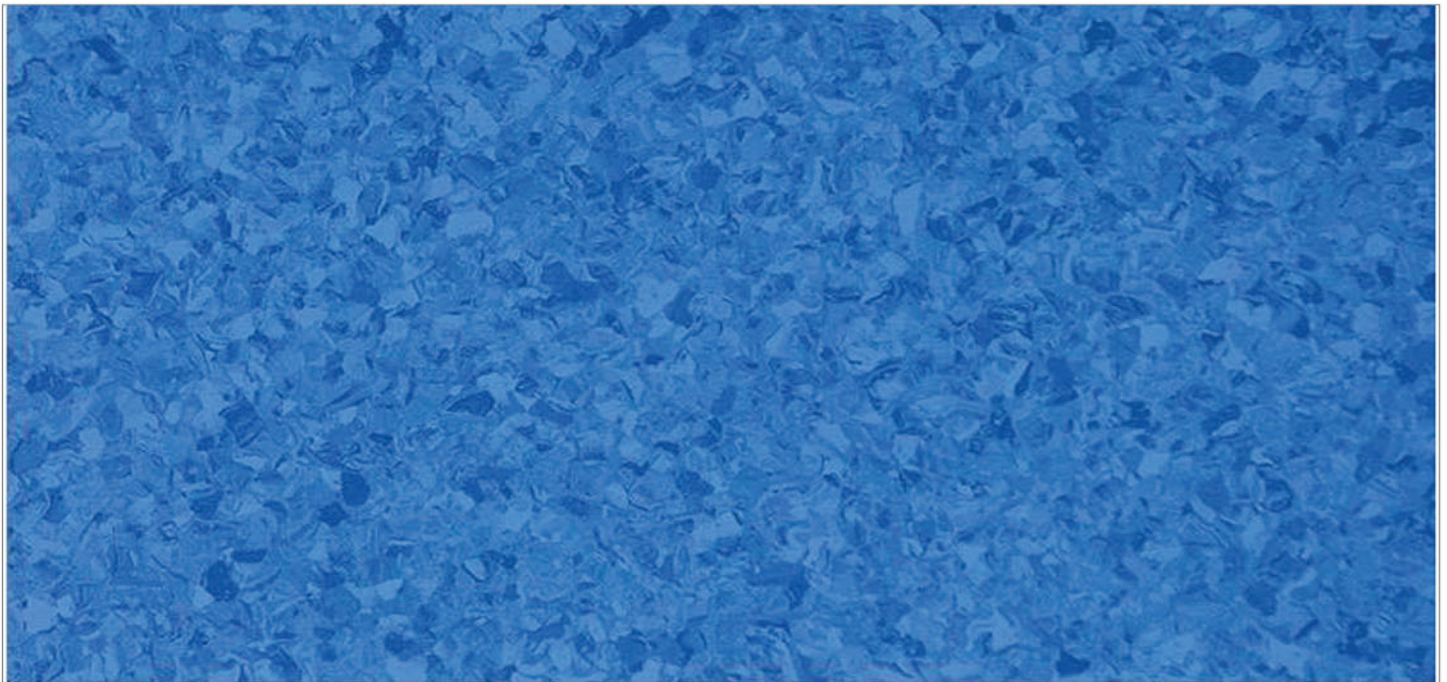

34-43

# Jeo Premium



6008 Apricot




6026 Chickoo




6031 Cashew




6007 Naseberry

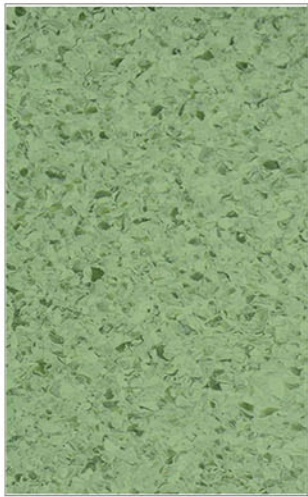

6005 Custard apple

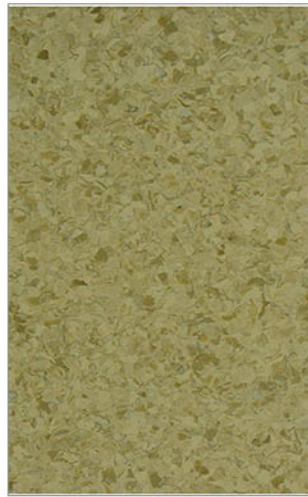

6003 Wood apple

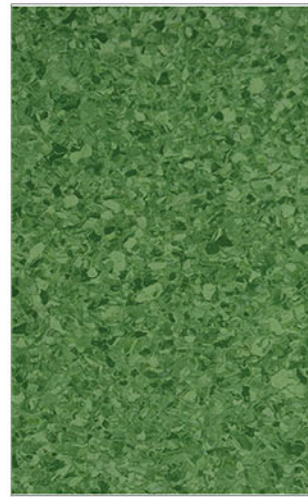


6010 Bread fruit




6020 Blackberry



6022 Blueberry

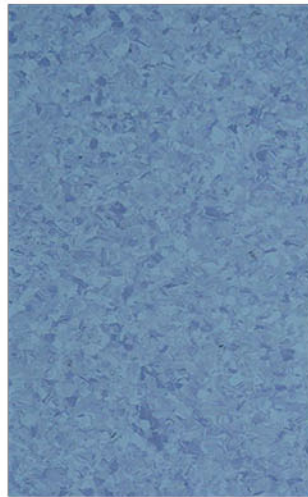

6032 Plum

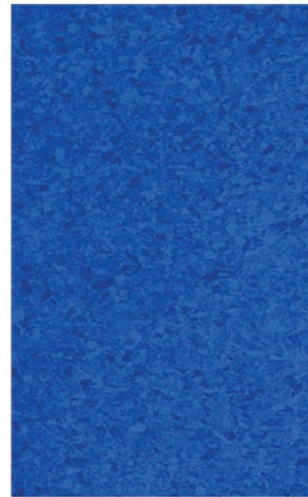

6018 Mulberry



6027 Blue plum





100%  
25.5%  
Recyclable  
Recycled content



# Jeo Premium



6016 Walnut




6023 Muskmelon



6012 Tamarind



6021 Pineapple

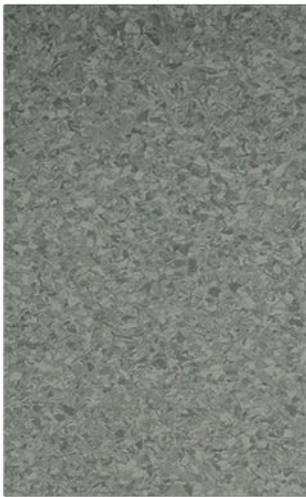

6029 Coconut



6001 Dragonfruit



6002 Quince




6006 Fig



6030 Peach



6017 Dates

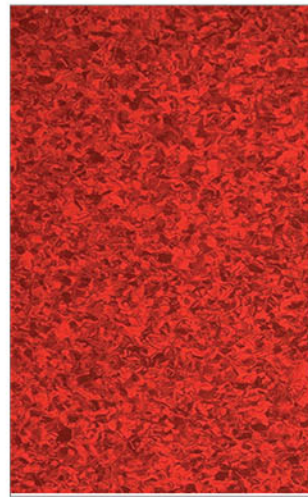

6019 Cherry



6013 Kiwi





# Creating Ideas for Better Living



## LCA

- Manufactured in an ISO 14001: 2015 certified
- Product specific EPD (Environmental Products Declaration) available
- Eco-designed according to a product specific Life Cycle Analysis
- Contribution to many Green Building Schemes
- Surface treatment PUR+ Iodine free protected to reduce drastically the use of chemical products and water and ensure the lowest environmental impact



## INDOOR AIR QUALITY

- TVOC emissions 100 times better than norm requirements (TVOC < 10 µg/m<sup>3</sup> after 28 days)
- SGS certified
- No formaldehyde emission



## WELLNESS

### Health

- Antibacterial activity (Inhibits growth > 99%)

### Comfort

- Walking comfort < 75 dB



## COMPOSITION

### 100% REACH compliant

- FREE of formaldehyde
- FREE of heavy metals
- FREE of Solvent



## RECYCLABILITY

- 100% recyclable product








## RECYCLED CONTENT

- 100% REACH compliant recycled content

## TECHNICAL SPECIFICATIONS

# Jeoflor Premium

DESCRIPTION			
Total thickness	EN 428	mm	2.0
Weight	EN 430	g/m <sup>2</sup>	2850
Width of sheet	EN 426	m	2
Length of sheet	EN 426	lm	20
CLASSIFICATION			
European classification	EN 685		23-33
Fire rating	EN ISO 9239-1 EN ISO 11925-2	Class	Bfl-s1
Toxic testing	GB 18586-2001		Good
Static electrical propensity	EN 1815	KV	≤ 2
Electrical resistance / Anti Static	EN 1081	Ω	10 <sup>9</sup> -10 <sup>10</sup>
Slip resistance	DIN 51130	Class	R9
PERFORMANCES			
Dimensional stability	EN 434	%	≤ 0.4
Thermal conductivity	EN 12524	W/(m.k)	0.25
Castor wheel test	EN 425	-	OK
Wear resistance	EN 660.2	mm <sup>3</sup>	≤ 2.0
Abrasion Group	EN 649	group	T
Type binder content	ISO 10581	type	I
Residual group	EN 433	mm	≈ 0.02
Colour fastness	EN 20 105 B02	degree	≥ 6
Chemical product resistance	EN 423	class	OK
Antibacterial property MRSA	ISO 22196	-	>99% inhibits growth
Flexibility	ISO 8690	-	Good
Decontamination rated	EN 435	-	Very good
Impact sound reduction	EN ISO 10140/1 EN ISO 717/2	-	Approx.+4DB
Surface treatment	-	UV Protected	PUR+ Iodine stain free
ENVIRONMENT / INDOOR AIR QUALITY			
TVOC after 28 days	ISO 16000 - 6	µg/m <sup>3</sup>	<10
CE MARKING			
	EN 14041		 DS  Bfl-s1 



### Be connected!



#Jeoflor



### Our related products!



Floor  
Self Leveling



Wall Coverings  
& Protections



Skirting &  
Profiles



Handrails



# Jeoflor

Alptahls GmbH, Bürgergasse 4, 8330 Feldbach, Austria. =

Tel. +43 (0)3152 370 49

info@jeoflor.com www.jeoflor.com

Toll Free : 18002028498