

Stark Click



Jeoflor[®]
AUSTRIA

Merits of STARK



High Density PU Coating

It assures you the longer life comparing to normal PU coating and durability against scratches.



Recycled Material

The products are made with recyclable material to contribute protecting environment, 100 % pure virgin products are available upon request.



Glass Fiber Sheet in Products

Glass fiber sheet is inserted in products to keep dimensional stability by preventing shrinkage & expansion on floorings.



Various Color / Pattern Design Collection

Wide choices for any flooring places by over 1000's various kinds of design and color.




Glueless Installation

Easy installation, no need of extra professional work with Click system and Loose lay tile.

Glueless luxury vinyl plank with patented technology

- High density PU coating
- Apply of US EPA approved organic and inorganic hybrid antibacterial agents
- Improved stability in environment of severe temperature change with reinforced glass fiber
- Easy installation free from adhesives

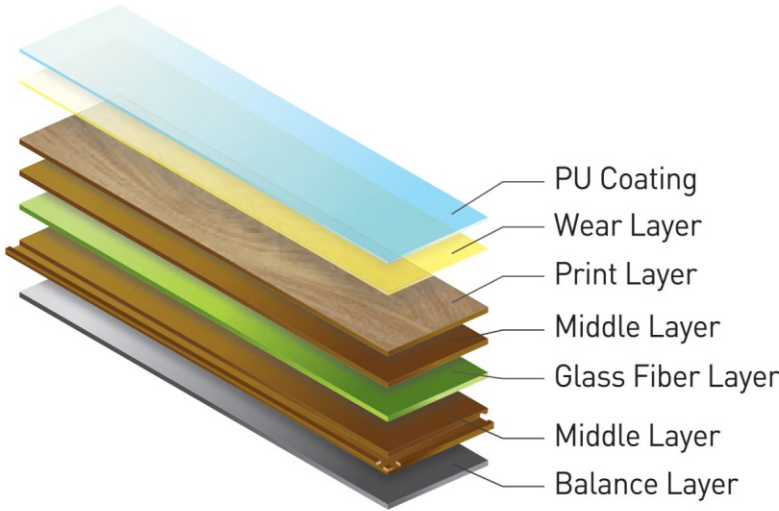

Stark Click

Dimensions : 5.0x470x470mm
Wear Layer : 0.5 to 0.7mm
Packing : 10pcs, 2.21m²/Box



DT 6601



Stark Click

Dimensions : 5.0x170x1210mm
Wear Layer : 0.5 to 0.7mm
Packing : 10pcs, 2.05m²/Box



3331



3370



3402



DB 6652



3330





34-43

Stark Click


Dimensions : 5.0x170x1210mm
Wear Layer : 0.5 to 0.7mm
Packing : 10pcs, 2.05m²/Box



1106




1905

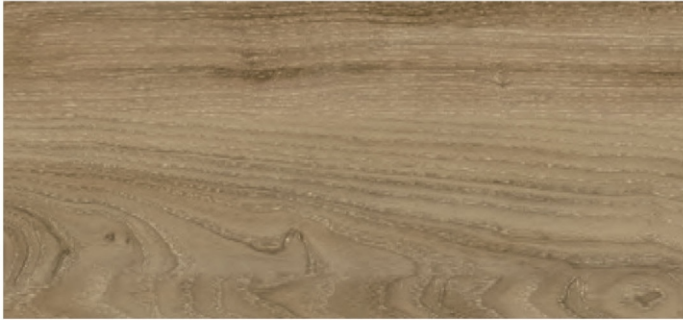


3151



3170

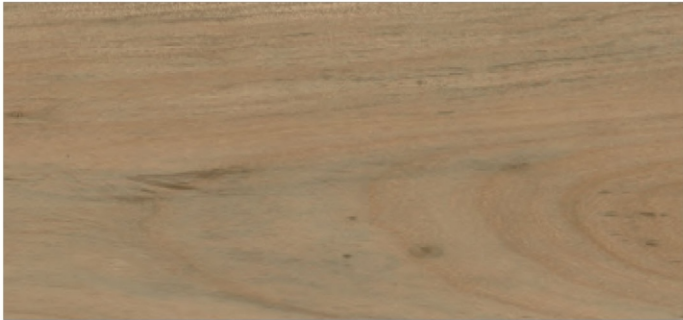

3230

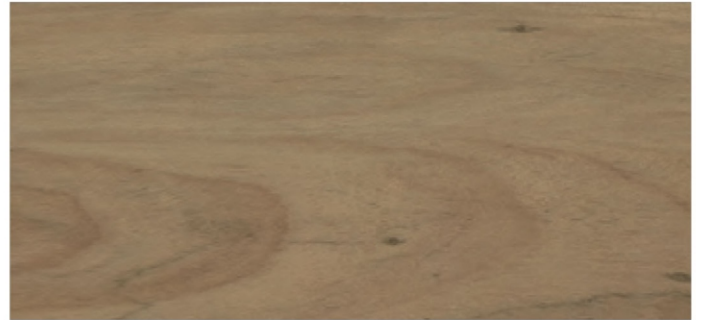

3231



3251



3302



Stark Click



Stark Click



Stark Click

LUXURY VINYL TILE / PLANK

TECHNICAL SPECIFICATION		PLANK	TILE	PLANK	TILE
DIMENSION		1000 x 200 mm	500 x 500 mm	1210 x 170 mm	470 x 470 mm
THICKNESS		3 mm	3 mm	5 mm	5 mm
WEAR LAYER*		0.3 to 0.7mm	0.3 to 0.7mm	0.5 to 0.7mm	0.5 to 0.7mm
SUPPORT		PVC	PVC	PVC	PVC
PROFILE		Plane	Plane	Click	Plane
SLIP RESISTANCE	EN 1815	DS	DS	DS	DS
ELECTROSTATIC VOLTAGE	EN 1401	Antistatic	Antistatic	Antistatic	Antistatic
CHAIR CASTOR	EN 425	Passed	Passed	Passed	Passed
WEAR RESISTANCE	EN 660-2	Group T	Group T	Group T	Group T
FIRE RESISTANCE	EN 13501	Bfl S 1	Bfl S 1	Bfl S 1	Bfl S 1
PACKAGE		3.2 m ²	3.25 m ²	2.05 m ²	2.21 m ²



LCA

Eco-designed according to a product specific Life Cycle Analysis



WELLNESS

Walking comfort < 75 dB



COMPOSITION

100% REACH compliant



INDOOR AIR QUALITY

TVOC emissions 100 times better than norm requirements (TVOC < 10 µg/m³ after 28 days)



RECYCLABILITY

100%



RECYCLED CONTENT

25%

Be connected!



#Jeoflor



Our related products!



Floor Self Leveling



Wall Coverings & Protections



Skirting & Profiles



Handrails

Jeoflor[®]

Alptahls GmbH, Bürgergasse 4, 8330 Feldbach, Austria.

Tel. +43 (0)3152 370 49

info@Jeoflor.com www.Jeoflor.com

Toll Free : 18002028498

