


UNI COMFORT

HETEROGENEOUS FLOORING



Jeoflor

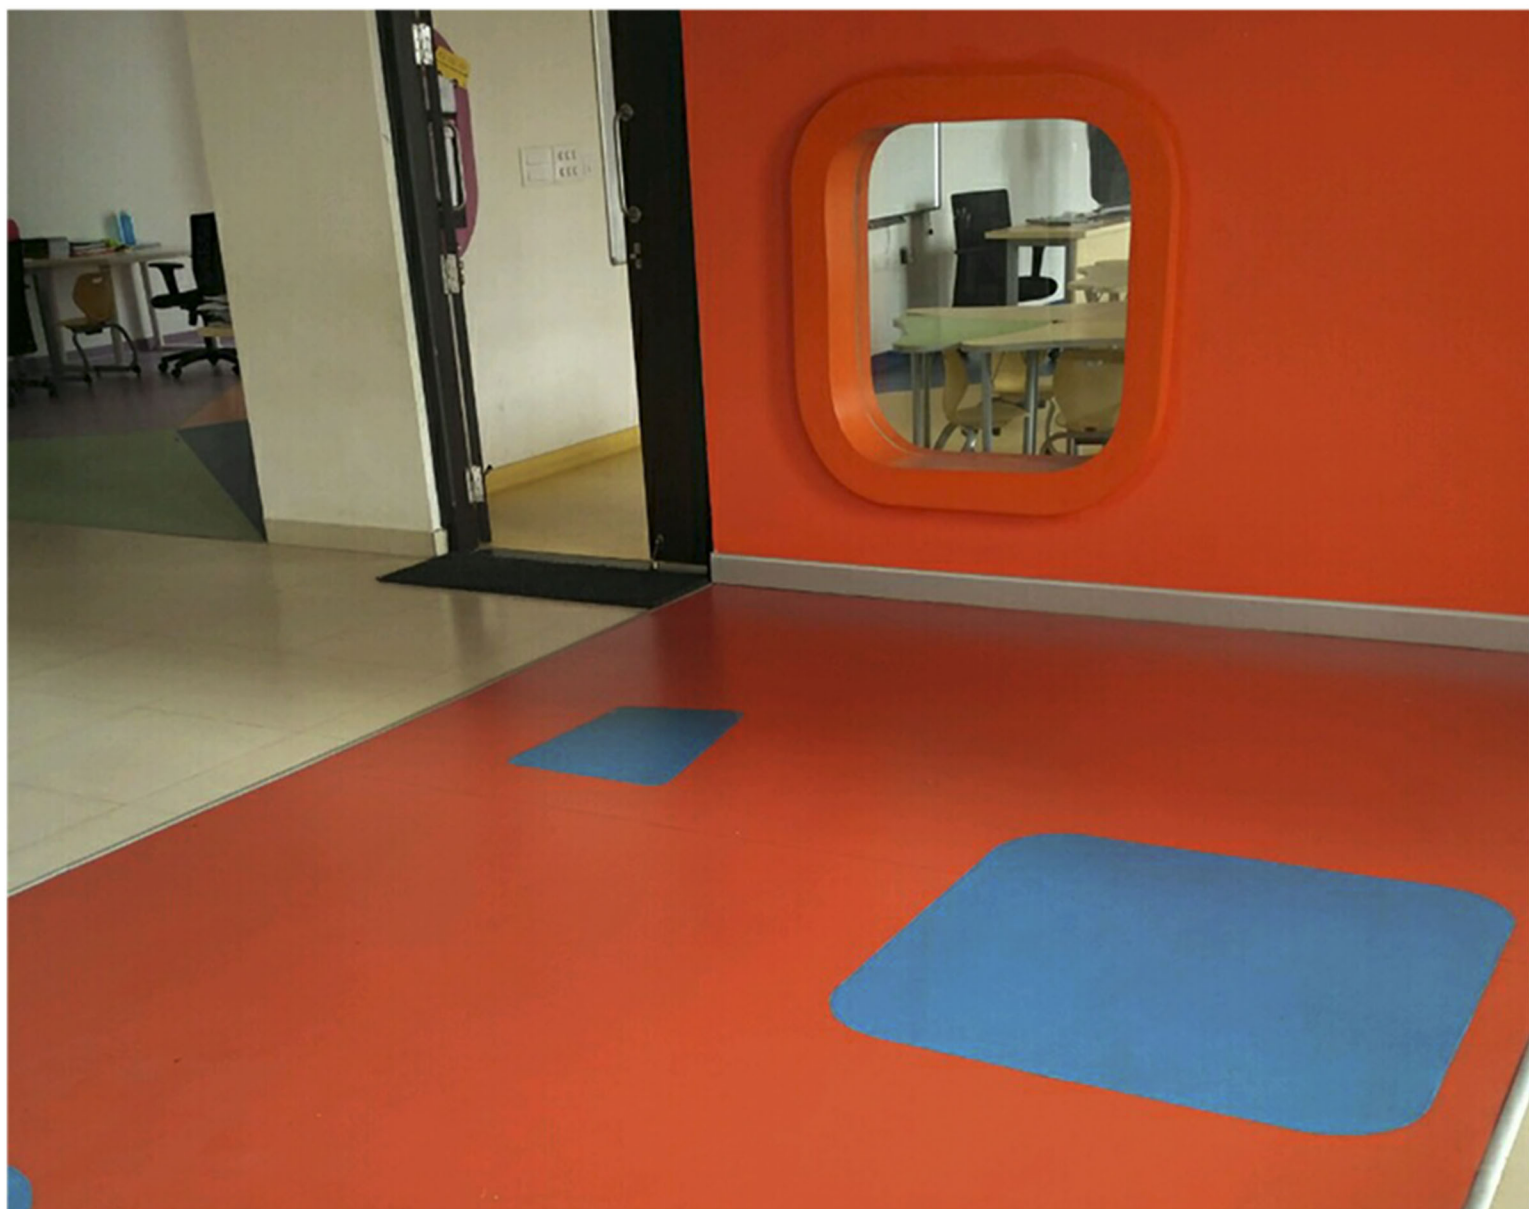

Jeoflor Uni Comfort range has a 17dB sound rating, which is ideal for those applications where sound insulation is key to the facility. This flooring is suitable for medium to high traffic areas including hospitals, schools, commercial public area's. A mix of solid vibrant colours are available, with excellent indentation resistance and recovery because of a Homogeneous backing.


Jeoflor Uni Comfort is an antistatic acoustic foam backed vinyl floor covering available in 2 x 20 mtr. wide roll form and offering 17 dB sound insulation. **Jeoflor** Uni Comfort has a plain coloured design making it ideal for cut design work.



34-43

19DB


UNI COMFORT

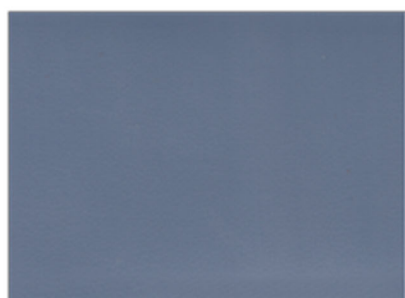

1001 Indigo



1002 Forest green

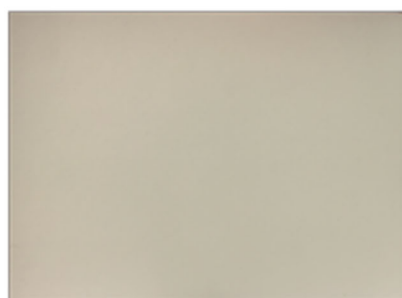

1003 Cream




1004 Black




1005 Charcoal



1006 Red

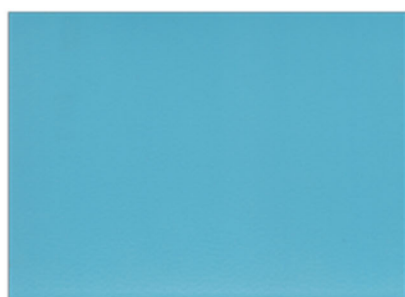


1007 Sky blue

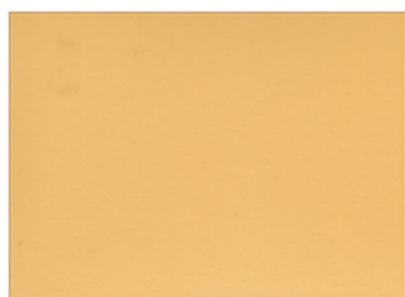


1008 Yellow



1009 Dark grey

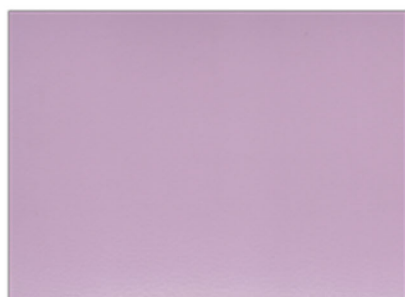

1010 Moove

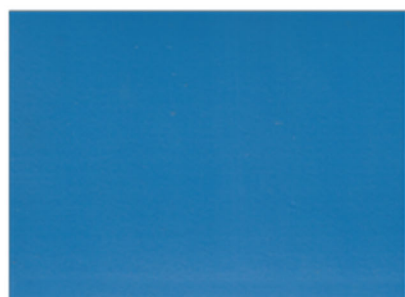

1011 Ocean blue




1012 Light grey



1013 Sea green





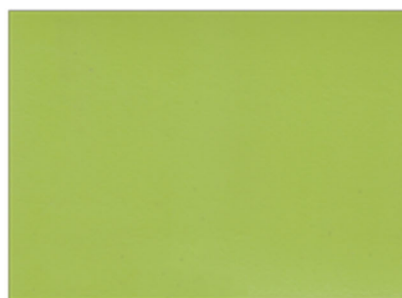


1014 Light blue



1015 Florescent

TECHNICAL SPECIFICATIONS

DESCRIPTION			
Total thickness	EN 428	mm	2.00
Thickness of wear layer	EN 429	mm	0.55
Weight	EN 430	g/m ²	2300
Length / Width	EN 426	cm/ml	20 / 2
CLASSIFICATION			
Product norm			EN 651
European	EN 685		34-42
Walking resonance	NF S 31-074	db	Class A
Sound insulation	EN ISO 717-2	db	17
Fire rating	EN 13501-1		C _s -s1
	NFP 92506		M3
	DIN 4102		B1
Static electrical charge	EN 1815	kV	<2 (anti-static)
Slip resistance dry	EN 13893		≥ 0.3
Slip resistance wet	EN 51130		R9
PERFORMANCE			
Abrasion resistance	EN 660.1		≤ 0.08
Abrasion group			T
Dimensional stability	EN 434	%	≤ 0.4
Indentation - Exigency	EN 433	mm	≤ 0.20
Indentation - Measure		mm	0.15
Thermal resistance	NFX 10021/DIN 52612	m ² K/W	≈ 0.04
Colour fastness	EN 20-105 B02		≥ 0.6
Chemical products resistance	EN 423		Good
Anti-bacterial and fungicidal treatment			Yes
Surface treatment			PUR+ Protected
CE MARKING			
	EN 14041	   	



Be connected!



#Jeoflor



Jeoflor

Our related products!



Floor
Self Leveling



Wall Coverings
& Protections



Skirting &
Profiles



Handrails

Jeoflor

Alptahls GmbH, Bürgergasse 4, 8330 Feldbach, Austria. 

Tel. +43 (0)3152 370 49

info@jeoflor.com www.jeoflor.com

Toll Free : 18002028498